CLV-GT

COPSATRICE ELETTRONICA

ELECTRONIC COPS-WINDER

OFFICINE GAUDINO S.p.A.

CLV-GT

La copsatrice modello CLV-GT consente di confezionare su cops, bottiglioni o rocchetti filamenti e/o filati di qualsiasi natura, direttamente da una ampia banchina di svolgimento (in sistema défiler) capace di un caricamento di rocche di notevoli dimensioi (vedi tabella). Un computer controlla in modo costante sia la velocità che la distribuzione del filo nelle sue svariate forme: degressive, progressive, piane, combinate, in ciclo continuo o ripetitivo. Rispetto alla copsatrice standard CLV-G, questo modello é corredato da tensionatori elettronici con motorino per ogni fuso (winding feeder della BTSR), inclusa taglierina per tagliare il filo quando ha raggiunto la lunghezza stabilita. Il sistema consente di programmare, visualizzare, correggere e salvare su pannello di tipo touch, anche in assenza di tensione, fino a 80 programmi e di richiamarli direttamente sulla macchina.

A richiesta è possibile fornire il sistema di oliatura del filamento.

The cops-winder model CLV-GT enables to wind filaments/yarns of any kind on cops, bottle-bobbins or flanged bobbins directly from a wide ssupply-board suitable for large supply packages (see chart). A computer ensures the constant winding speed and the filament distribution with different winding shapes: degressive, progressive, plain, combined, with continuous or repetitive cycle. Compared to the standard cops-winder model CLV-G, this model is supplied with an electronic tensioner with single motor for each spindle (winding feeder by BTSR), including a cutter to cut the filament once the required length has been reached. The touch screen panel enable to programme, to visualize, to correct and to save, also in case ofmain power black-out, up to 80 programmes and to recall them directly on the machine.

If required, an oiling system for the filaments can be supplied with the machine.

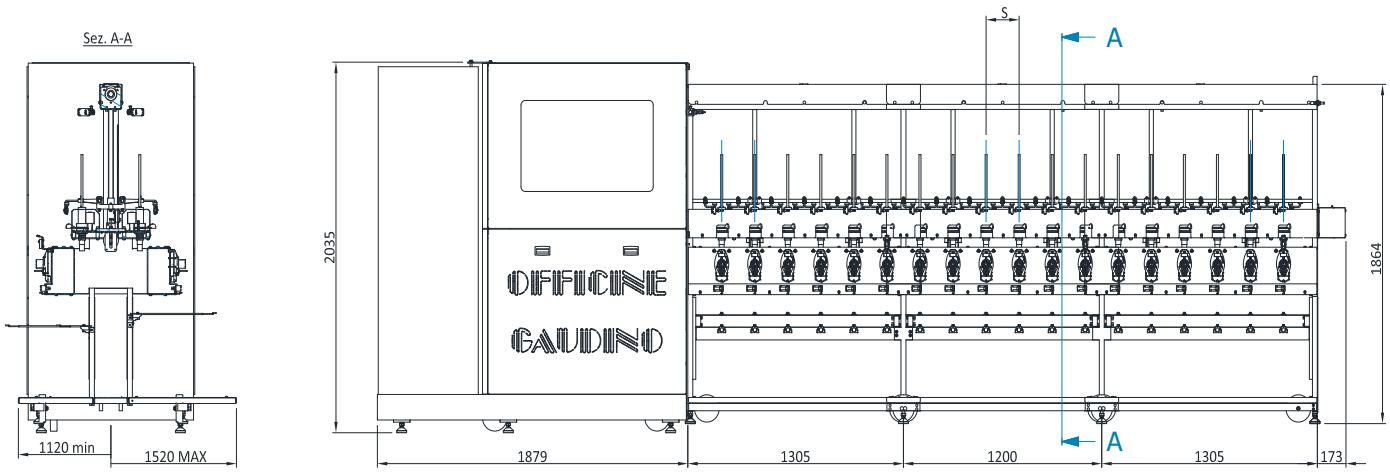

TYPE OF MACHINE		CLV- GT200
Spindles Gauge	mm	200
Max Spindles Number	N°	108
Spindles per Section	N°	8
Min.-Max Section Number	N°	2-8
Max Traverse	mm	400
Max diameter Upper package	mm	170
Max diameter Final Package	mm	360
Max installed power	Kw	15

Officine Gaudino S.p.A.

Via XXV Aprile, 16 – 13836 COSSATO (BI)
Casella Postale 73
R.E.A. N. 127729 – Registro Società Tribunale di Biella N.7776
Codice Fiscale e Partita IVA/VAT Code IT 01224430023
Phone (main) +39 015 925241
Phone (ricambi – spare parts) +39 015 927163
Fax +39 015 9840055
Fax (ricambi – spare parts) +39 015 9840001
www.gaudino .com
e-mail:
Main gaudino@gaudino.com
Sales dept. robertogaudino@gaudino.com
Spare dept. mikagaudino@gaudino.com
Spare dept. gaudinoricambi@gaudino.com
R&D gaudinotec@gaudino.com
Purchase dept gaudinoacq@gaudino.com
accountancy gaudinocommerc@gaudino.com
electronic spare parts gaudinoelettro1@gaudino.com